Advantage.
Environmental Lighting

X1UBAA

BAA Compliant Aluminum LED Edgelit Exit Sign

STANDARD | OPTIONAL

ILLUMINATION

- *Ultra-bright, energy efficient, long-life Red or Green LED.*
- *UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.*
- *Double face utilizes factory installed silver or white mylar background panel.*

ELECTRICAL

- *Dual 120/277 voltage.*
- *Charge rate power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *4.8V long life, maintenance-free, rechargeable NiCd battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *Aluminum mounting canopy included for top, end or back mount.*

HOUSING

- *Premium-grade, extruded aluminum housing.*
- *Self-adhesive Chevron appliqués and guide template provided for directional indication.*

OPTIONS

- *2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.*
- *SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.*
- *SPV: UL Listed for 208/220/240 Volt, 50/60Hz.*
- *Custom: Signs available with requested 'special' wording..*

WARRANTY/LISTING

- *Five year warranty on all electronics and housing. Battery pro-rated for five years.*
- *Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.*
- *UL listed for damp locations. (0°C – 50°C)*

DIMENSIONS

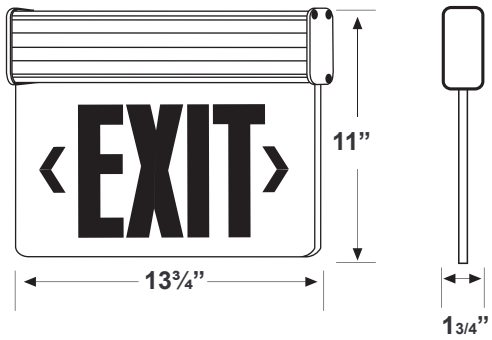

Sample Part Number: **X1UBAA1RCAEM**

ORDERING INFORMATION

MODEL	No. of FACES		LETTER COLOR		PANEL		HOUSING COLOR		BATTERY		OPTIONS	
X1UBAA	*1*	*Single Face*	*R*	*Red*	*C*	*Clear*	*A*	*Aluminum*	*(blank)*	*AC-Only*	*2C-120*	*Dual Circuit With 120V Input* [1]
	2	*Double Face*	*G*	*Green*	*M*	*Mirror*	*W*	*White*	*EM*	*Battery Backup*	*2C-277*	*Dual Circuit With 277V Input* [1]
					W	*White*					*SDT*	*Self-Diagnostics* [2]
											SPV	*208/220/240 Volt, 50/60Hz* [3]
											CUSTOM	*Custom Wording*

[1] *Available only with AC units.*
[2] *Available only with EM units .*
[3] *Not available with SDT.*