



Advantage Environmental Lighting

X3U Compact LED Exit Sign

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

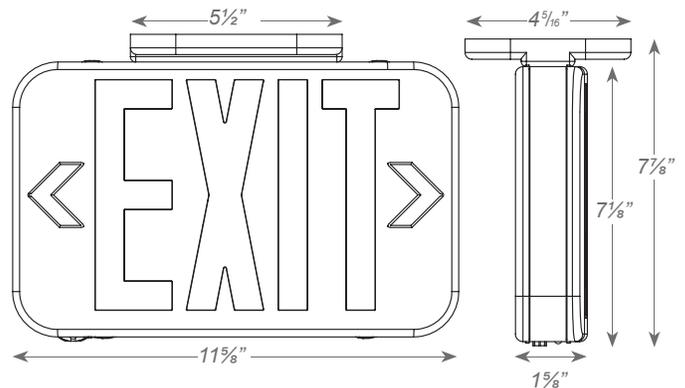

ORDERING INFORMATION

Sample Part Number: **X3U-1-R-W-EM**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
X3U	1 Single Face	R Red	W White	Blank AC Only
Best # EZRXTU	2 Universal Single/ Double Face	G Green	B Black	EM Battery Backup



Advantage Environmental Lighting

X3U Compact LED Exit Sign

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
X3U-RED/GREEN/EM	1.0	1.0	0.09	0.09

MAY 23, 2018

T (817) 468-3591

E info@aelnow.com

www.aelnow.com

Specifications subject to change without notice.