


# XDL4R 4.0" x 4.5" Linear Recessed

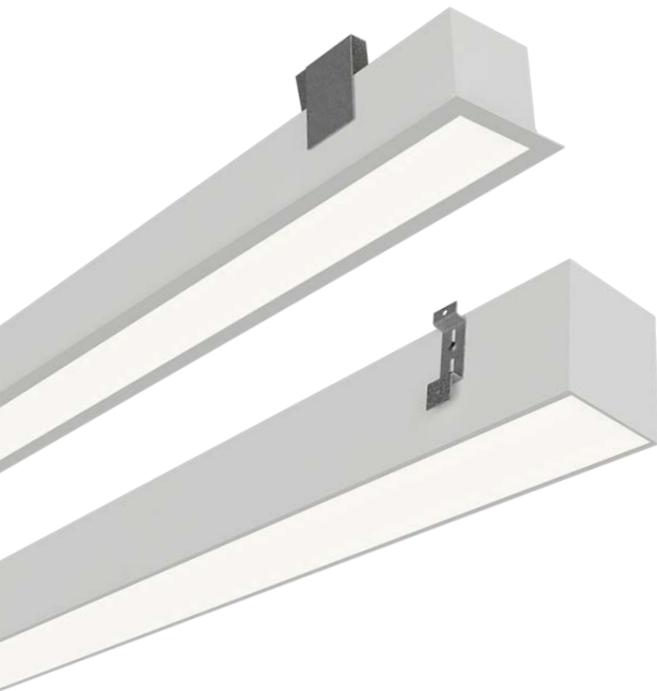

PROJECT \_\_\_\_\_

CATALOG # \_\_\_\_\_

TYPE \_\_\_\_\_

## Highlights

- Tool-Less Entry
- High efficacy and lifespan LEDs
- Recessed, Flanged, and Flangeless Trim mounting

### Description

The XDL4R is a recessed LED linear fixture, design with quality craftsmanship. Engineered for quick and easy tool-less installation. The XDL series provides clean lines, smooth continuous runs, and tight lens fitment. Available in continuous runs and custom angles and lengths.

### Construction

Constructed of a precision cut, proprietary aluminum extrusion with flat end caps. Internal joiner system. Available in any length with a 2' minimum.

### Tool-less Entry

LED Board tray clips in with quick release holders, and held on by tethers. Releasing the clips drops and holds the board tray, allowing quick, tool-less, and easy wiring of the fixture.

### Mounting

Lay-in grid fixtures fit 9/16 and 15/16 standard T-grids. Flanged mounting and flangeless trim mounting options include innovative top mount bracket to support the fixture.

### LEDs

High Output LEDs are available in 2700K, 3000K, 3500K, 4000K, and 5000K color temperatures. Integral LEDs are rated for at least 100K life hours (L70).

### Optics

Snap-in satin acrylic lens fully diffuses the appearance of the LEDs and provides excellent light transmission.

### Driver

0-10V dimming driver included standard. Driver options available for 1% dimming, Lutron EcoSystem, and DALI.

### Finish




Matte white finish standard. Custom finish options are available in various RAL colors.

### Options

Various options are available. If additional or custom options are needed, consult factory.

### Listings

BAA Compliant. Designed and manufactured in the USA. UL listed.

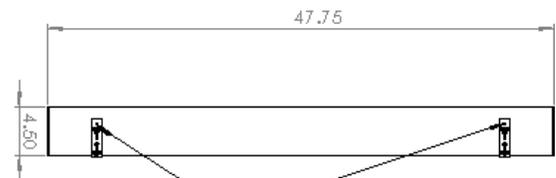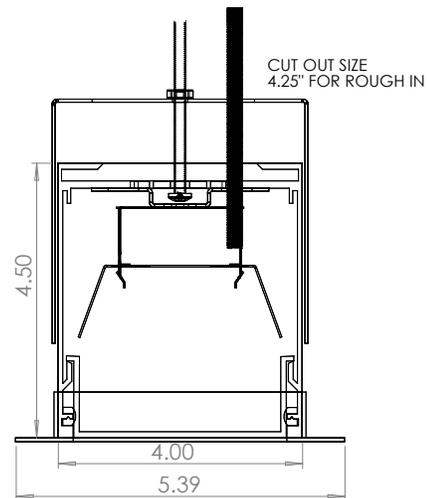

ADJUSTABLE GRID CLIP



# XDL4R 4.0" x 4.5" Linear Recessed



## ORDERING INFORMATION

**Example:** XDL4R-L-40-10L-M-W-4  
 With options: XDL4R-L-40-10L-M-W-4-12EBL

| Fixture | Mounting                              | CCT                         | Output                              | Voltage  | Finish                               | Length                    |
|---------|---------------------------------------|-----------------------------|-------------------------------------|--|--------------------------------------|---------------------------|
| XDL4R   | ■ <b>L</b><br><i>Lay-in Grid</i>      | ■ <b>27</b><br><i>2700K</i> | ■ <b>5L</b><br><i>500 Lm/Ft</i>     | ■ <b>M</b><br><i>Multi-Volt<br/>(120-277V)</i> | ■ <b>W</b><br><i>Matte White</i>     | ■ <b>2</b><br><i>2 ft</i> |
|         | ■ <b>F</b><br><i>Flanged</i>          | ■ <b>30</b><br><i>3000K</i> | ■ <b>7L</b><br><i>700 Lm/Ft</i>     |  | ■ <b>SP</b><br><i>Special Finish</i> | ■ <b>3</b><br><i>3 ft</i> |
|         | ■ <b>FT</b><br><i>Flangeless Trim</i> | ■ <b>35</b><br><i>3500K</i> | ■ <b>10L</b><br><i>1000 Lm/Ft</i>   |  | ■ <b>4</b><br><i>4 ft</i>            |                           |
|         |                                       | ■ <b>40</b><br><i>4000K</i> | ■ <b>14L</b><br><i>1400 Lm/Ft</i>   |  | ■ <b>5</b><br><i>5 ft</i>            |                           |
|         |                                       | ■ <b>50</b><br><i>5000K</i> | ■ <b>XXXXL</b><br><i>XXXX Lm/Ft</i> |  | ■ <b>6</b><br><i>6 ft</i>            |                           |
|         |                                       |                             |                                     |  | ■ <b>7</b><br><i>7 ft</i>            |                           |
|         |                                       |                             |                                     |  | ■ <b>8</b><br><i>8 ft</i>            |                           |
|         |                                       |                             |                                     |  | ■ <b>XX</b><br><i>XX ft</i>          |                           |

For special runs, such as wall-to-ceiling, 90 degree or custom angle turns, add desired length after the option.  
 eg: XDL4R-FT-40-10L-M-W-14-90D-13 for 14 foot to 90 degree turn to 13 foot.

### Options: Add to end of part number

| Driver Options   | Options  |
|--|--|
| ■ <b>(BLANK)</b><br><i>0-10V 10% dimming driver</i>            | ■ <b>14EBL</b><br><i>14 Watt Emergency Ballast</i>       |
| ■ <b>CD1</b><br><i>0-10V 1% dimming driver</i>                 | ■ <b>EC</b><br><i>Emergency Circuit</i>                  |
| ■ <b>CD5</b><br><i>0-10V 5% dimming driver</i>                 | ■ <b>90</b><br><i>90 CRI</i>                             |
| ■ <b>EDN</b><br><i>Non-dimming electronic driver</i>           | ■ <b>90D</b><br><i>90 Degree Turn</i>                    |
| ■ <b>DALI</b><br><i>DALI 1% dimming driver</i>                 | ■ <b>90V</b><br><i>90 Degree Ceiling-to-Wall</i>         |
| ■ <b>LDE1</b><br><i>Lutron Hi-Lume 1% EcoSystem LED Driver</i> | ■ <b>XXD</b><br><i>XX Degree turn (90 to 60 degrees)</i> |

# XDL4R 4.0" x 4.5" Linear Recessed

## SPECIFICATIONS

### LED Information

| Output            | 5L           | 7L           | 10L          | 14L          |
|-------------------|--------------|--------------|--------------|--------------|
| Lumens/Ft*        | 500          | 700          | 1000         | 1400         |
| System Wattage/Ft | 3.125W       | 4.375W       | 6.25W        | 8.75W        |
| Efficacy (Lm/W)   | 160          | 160          | 160          | 160          |
| CRI               | >82          | >82          | >82          | >82          |
| Dimming           | 0-10V        | 0-10V        | 0-10V        | 0-10V        |
| Color Consistency | >3 SDCM      | >3 SDCM      | >3 SDCM      | >3 SDCM      |
| Rated Life (L70)  | >100,000 hrs | >100,000 hrs | >100,000 hrs | >100,000 hrs |

\* Lumen output was calculated with 4000K LEDs.

### Lumen Adjustment Factors 80 CRI


| CCT        | 2700K | 3000K | 3500K | 4000K  | 5000K  |
|------------|-------|-------|-------|--------|--------|
| Adjustment | 93.5% | 95.2% | 96.8% | 100.0% | 103.0% |

### Lumen Adjustment Factors 90 CRI

| CCT        | 2700K | 3000K | 3500K | 4000K | 5000K |
|------------|-------|-------|-------|-------|-------|
| Adjustment | 77.5% | 79.2% | 80.8% | 85.1% | 87.3% |

### Innovative Features

- Light trap prevents light leaks

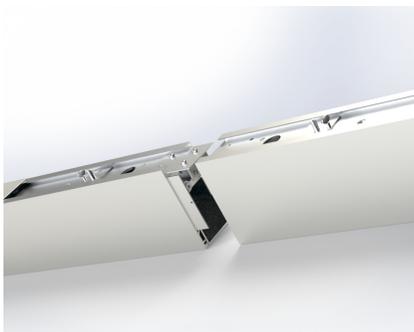


- Board tray quick-release holders




- Board tray connected with tethers




**File Name: XDL4R-X-40-5L-M-W-4.IES**  
**XDL4R 4.0" X 4.5" LED Recessed 5L Output**

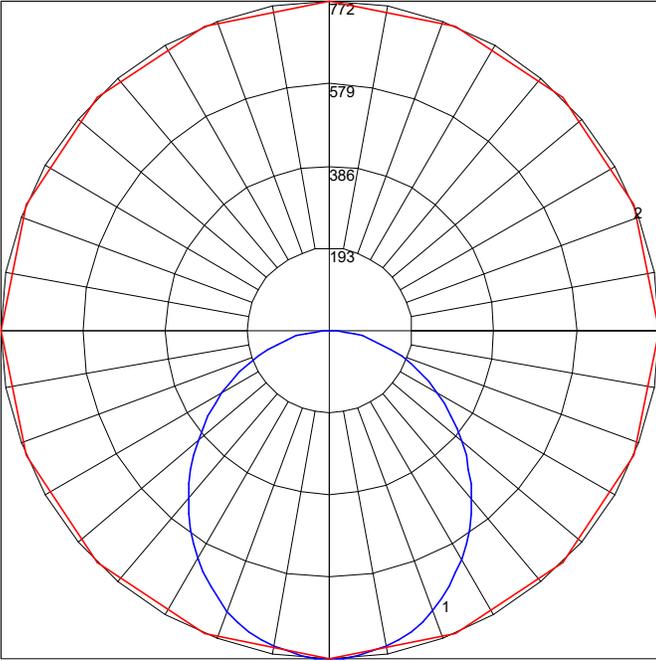

**File Name: XDL4R-X-40-7L-M-W-4.IES**  
**XDL4R 4.0" X 4.5" LED Recessed 7L Output**

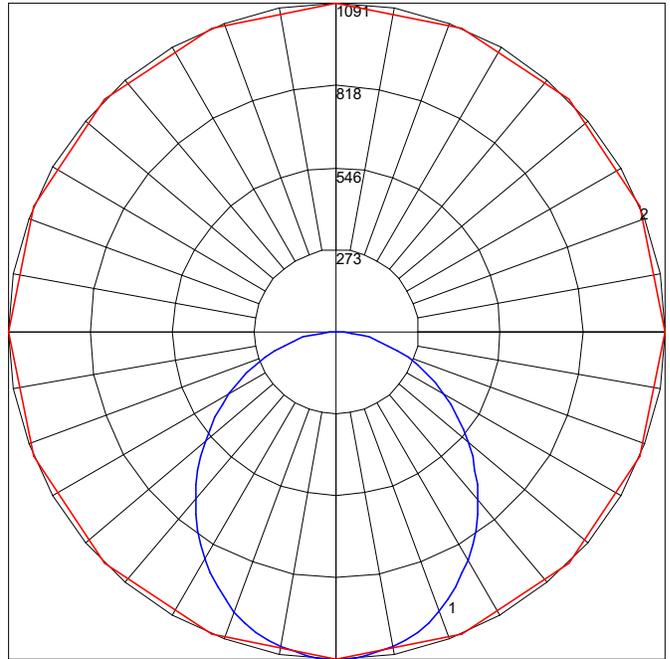

**File Name: XDL4R-X-40-10L-M-W-4.IES**  
**XDL4R 4.0" X 4.5" LED Recessed 10L Output**

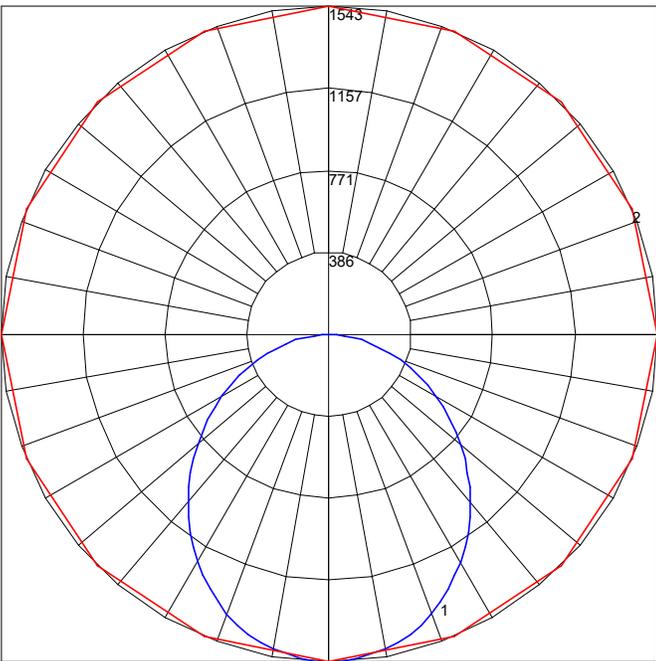

**File Name: XDL4R-X-40-14L-M-W-4.IES**  
**XDL4R 4.0" X 4.5" LED Recessed 14L Output**

