Advantage Environmental Lighting

XEM8U

LED Exit & Incandescent Emergency Combo

STANDARD | OPTIONAL

ILLUMINATION

- *Two fully adjustable 5.4W, glare-free lamp heads.*
- *Smooth thermoplastic reflector and plastic lens for optimal light distribution.*
- *Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.*

ELECTRICAL

- *Dual 120/277 voltage.*
- *Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *LVD (low voltage disconnect) prevents battery from deep discharge.*
- *6V maintenance-free, rechargeable sealed lead acid battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *EZ-snap mounting canopy included for top or end mount.*
- *Universal knockout pattern on back plate for wall mount.*

HOUSING

- *Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.*
- *EZ snap-out Chevron directional indicators.*

OPTIONS

- *RC: Remote capacity of up to 11.0 watts.*
- *HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.*
- *SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.*
- *USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.*

WARRANTY / LISTING

- *Five year warranty on all electronics and housing. Battery prorated for two years.*
- *Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.*
- *UL Listed for damp locations (20°C – 40°C).*
- *Certified to CEC under Title 20 Regulations.*
- *Meets CSA C22.2 No. 141-02 requirements for unit equipment.*

DIMENSIONS

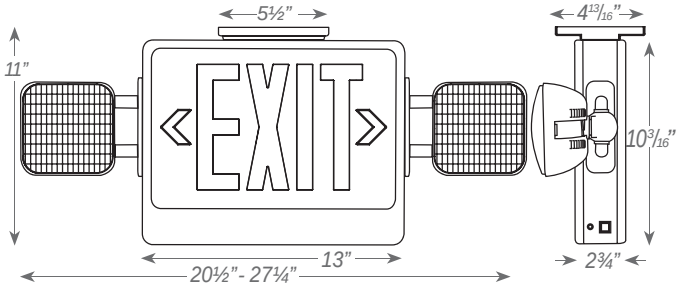

ORDERING INFORMATION

Sample Part Number: **XEM8U2RW**

Special voltage & SALIDA face plate options available. Check with your Advantage Representative.

[1] *Not available with RC units.*

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
XEM8U	*2*	*Universal Single/ Double Face*	*R*	*Red*	*W*	*White*	*RC*	*Remote Capacity*
			G	*Green*	*B*	*Black*	*HTR*	*Internal Heater* [1]
Best # CXTEU							*SDT*	*Self-diagnostics*
							USA	*Assembled in USA*

T (817) 468-3591 E info@aelnow.com www.aelnow.com

Specifications subject to change without notice.

Advantage.
Environmental Lighting

XEM8U

LED Exit & Incandescent Emergency Combo

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XEM8U/SDT	10	10	0.10	0.05
XEM8U/RC-SDT	15	15	0.12	0.06