Advantage.
Environmental Lighting

XEM9U

All LED Exit & Emergency Combo

-NH model

STANDARD | OPTIONAL

ILLUMINATION

- *Long lasting, efficient ultra-bright white LED lamp heads.*
- *1 watt (8 LEDs x 0.125 watt) per head*
- *High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution.*
- *Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.*
- *Long-life, energy efficient Red or Green LED exit sign illumination.*

ELECTRICAL

- *Dual 120/277 voltage.*
- *Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.*
- *9.6V Long-life, maintenance-free, rechargeable NiCd battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *EZ-snap mounting canopy included for top or end mount.*
- *Universal K/O pattern on back plate for wall mount.*

HOUSING

- *Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.*
- *EZ snap-out Chevron directional indicators.*

OPTIONS

- *HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).*
- *SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.*
- *NH: No lamp head attach to the unit enabling it to be used as remote capable exit sign.*
- *RC: Remote Capacity option available.*

WARRANTY/LISTING

- *Five year warranty on all electronics and housing. Battery pro rated for f ive years.*
- *Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.*
- *UL Listed for damp locations (0°C – 40°C).*
- *Certified to CEC under Title 20 Regulations.*

DIMENSIONS

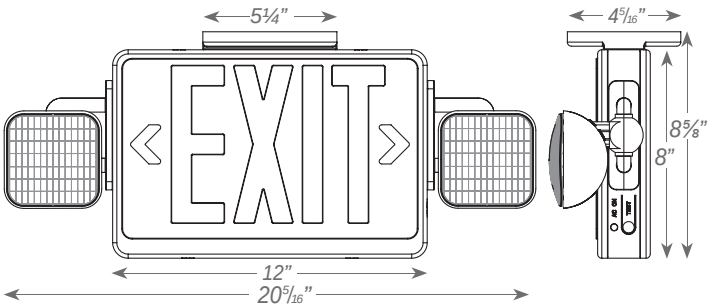

ORDERING INFORMATION

Sample Part Number: ***XEM9U-2-R-W***

Special voltage & SALIDA face plate options available. Check with your Advantage representative.

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
XEM9U	*2*	*Universal Single/ Double Face*	*R*	*Red*	*W*	*White*	*RC*	*Remote Capacity*
Best # LEDCXTEU			*G*	*Green*	*B*	*Black*	*HL*	*High Lumen*
							NH	*No Lamp Heads*
							SDT	*Self-diagnostics*

Advantage.
Environmental Lighting

XEM9U

All LED Exit & Emergency Combo

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XEM9U-RED	3.7	3.8	0.040	0.020
XEM9U-GREEN/RC	3.0	3.2	0.030	0.014
XEM9U-RED-RC	3.4	3.6	0.033	0.015
XEM9U-RED/GREEN-SDT/RC-SDT	5.2	5.7	0.046	0.022