




**1** Lay all 4 side flanges down on a flat surface. Install provided screws into each intersection of the flange bars. Repeat until you have completed the flange body (4 corners).

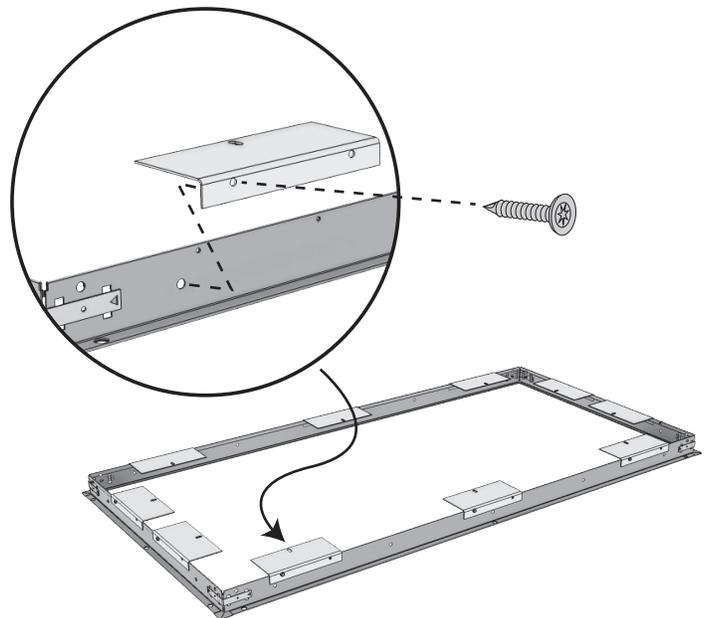


**2** Install security brackets to the back of your completed flange. Use all brackets provided (number of brackets may vary based on size of fixture).

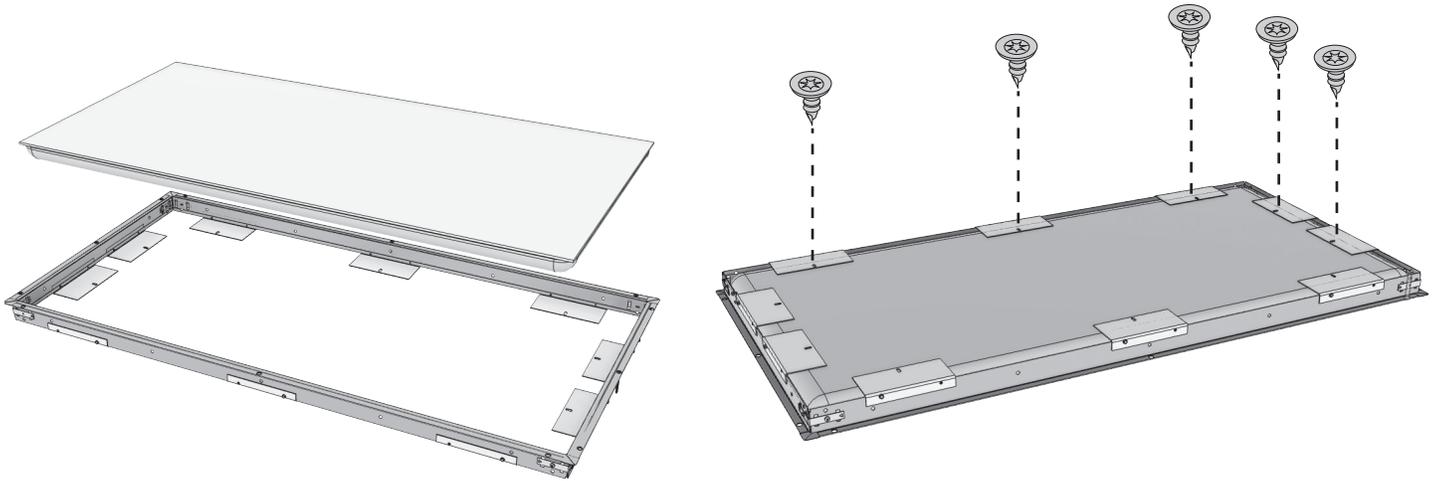

**3** Place light fixture into completed frame, and secure fixture from back with included fasteners.

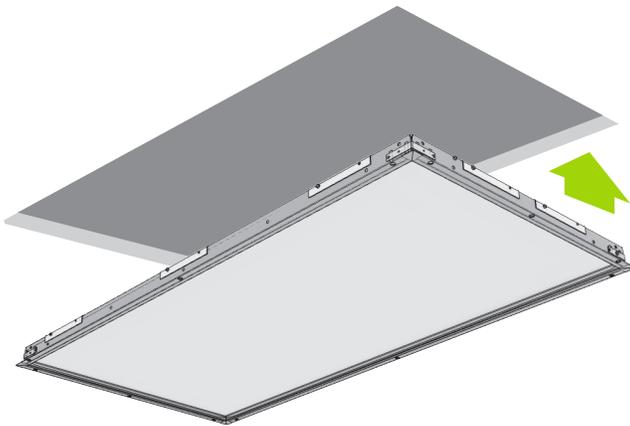


**4** Raise completed configuration up into ceiling.

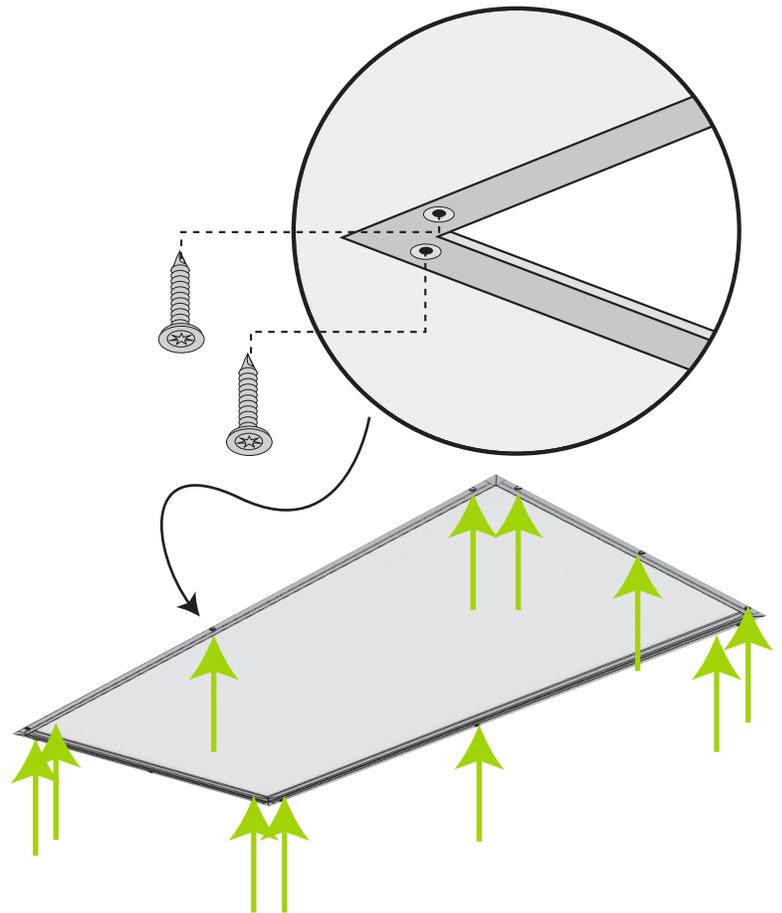


**5** Secure fixture to ceiling with security fasteners.

**1X4**

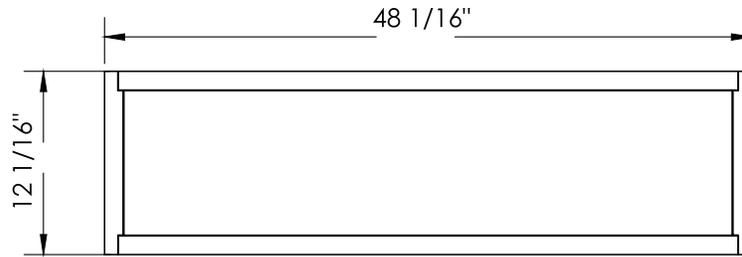


SUGGESTED ROUGH-IN:  $12 \frac{3}{16}$  X  $48 \frac{3}{16}$ "

**2X4**

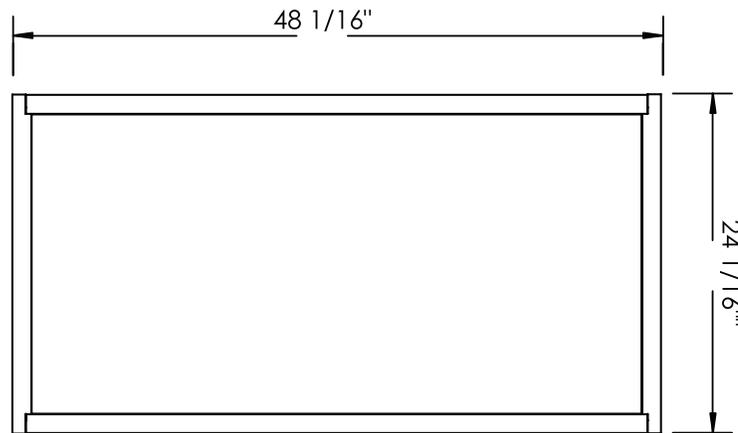

SUGGESTED ROUGH-IN:  $48 \frac{3}{16}$  X  $24 \frac{3}{16}$ "

**2X2**

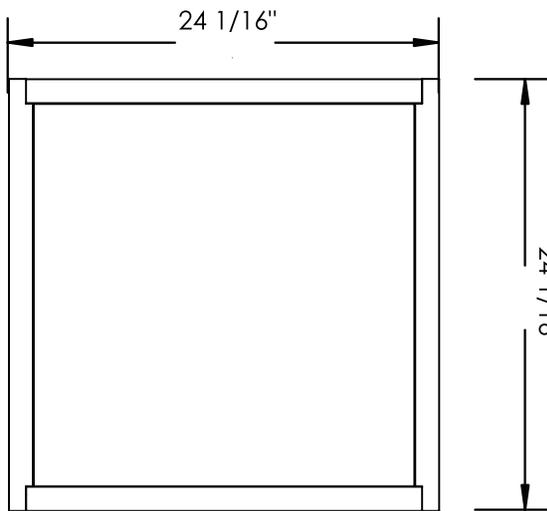

SUGGESTED ROUGH-IN:  $24 \frac{3}{16}$ " X  $24 \frac{3}{16}$ "