

**CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!**



**WARNING:** Before beginning installation, disconnect electrical power at main switch or circuit breaker.




### IMPORTANT SAFEGUARDS:


Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable. Installation and servicing of this equipment should be performed by qualified service personnel only. Do not mount near gas or electric heaters. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability. Do not use this equipment for other than intended use.

## HARD CEILING MOUNTING


The fixture is suitable only for INDOOR applications. Rear access is required.

1. Construct an opening (dimensions found on final page). Rotate and slide the Housing as required to fit through the opening and place it as indicated by the directional arrow in figure.
2. Swing the stabilizing arms outward to support fixture.
3. Wire fixture per regulations.

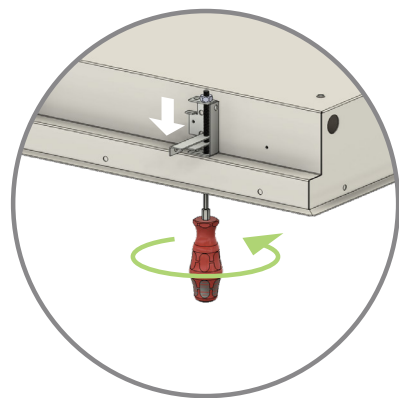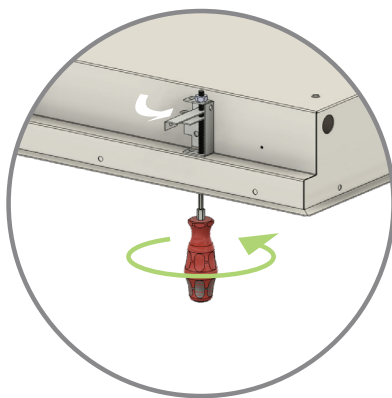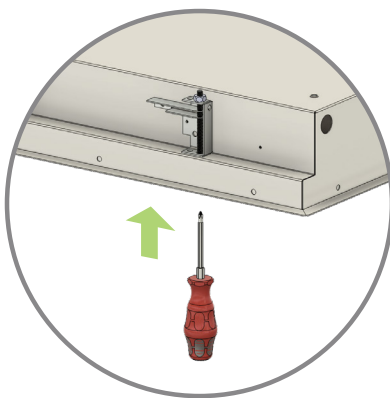

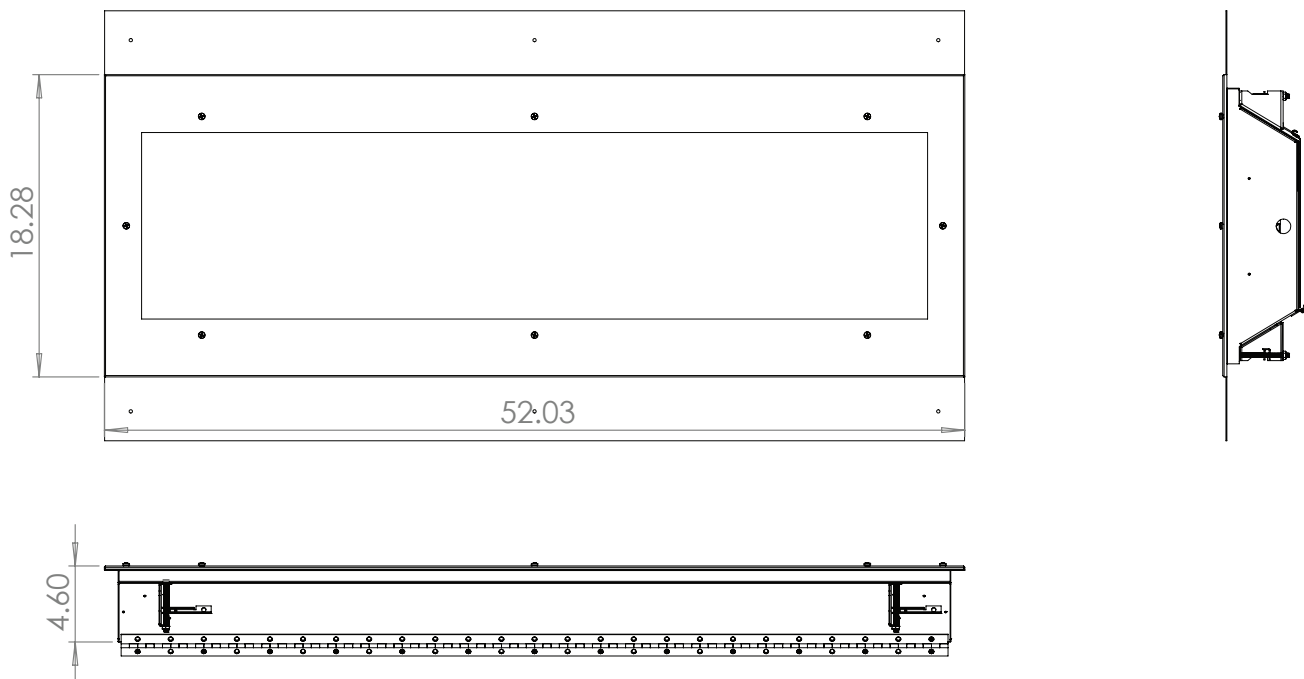





**ROUGH IN SIZE: 50 5/8" X 16 3/4"**

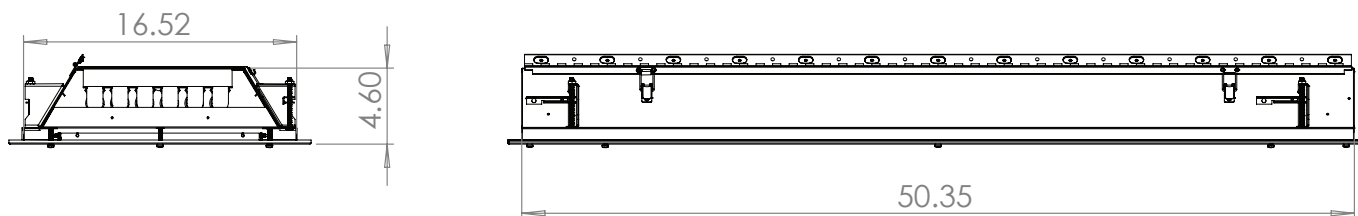

## WALL MOUNTING

The fixture is also suitable for INDOOR WALL mounting applications.

1. Construct an opening (dimensions found on final page). Place Housing in the opening.
2. Swing the stabilizing arms outward to support fixture.
3. Wire fixture per regulations.

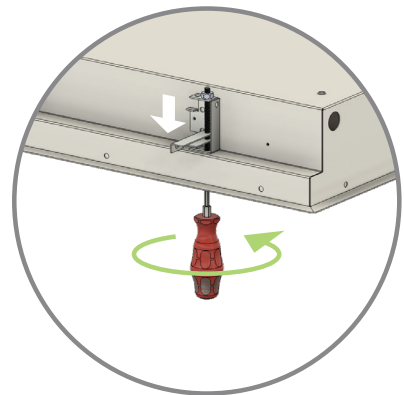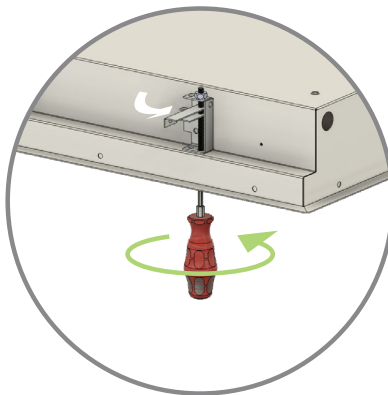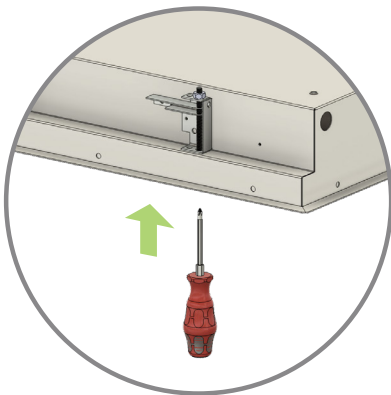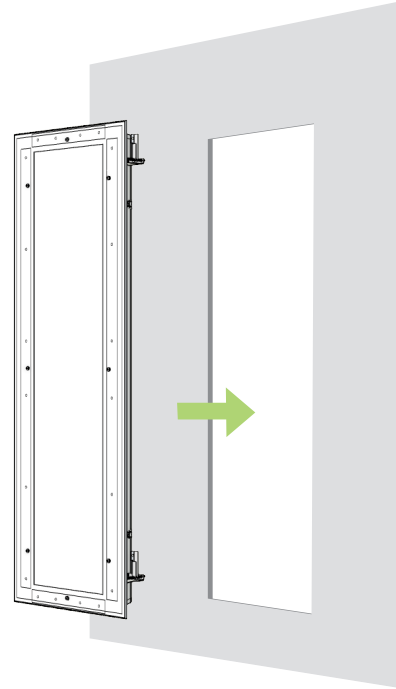

## WIRING ACCESS POINTS

Back of fixture

