

CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!




WARNING: Before beginning installation, disconnect electrical power at main switch or circuit breaker.

IMPORTANT SAFEGUARDS

Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable. Installation and servicing of this equipment should be performed by qualified service personnel only. Do not mount near gas or electric heaters. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability. Do not use this equipment for other than intended use.

GENERAL INSTRUCTIONS

1) Remove fasteners and washers from door and set aside. Lift door out of body. Remove fasteners and both brackets on the side of the plastic housing. Lift out and set aside.

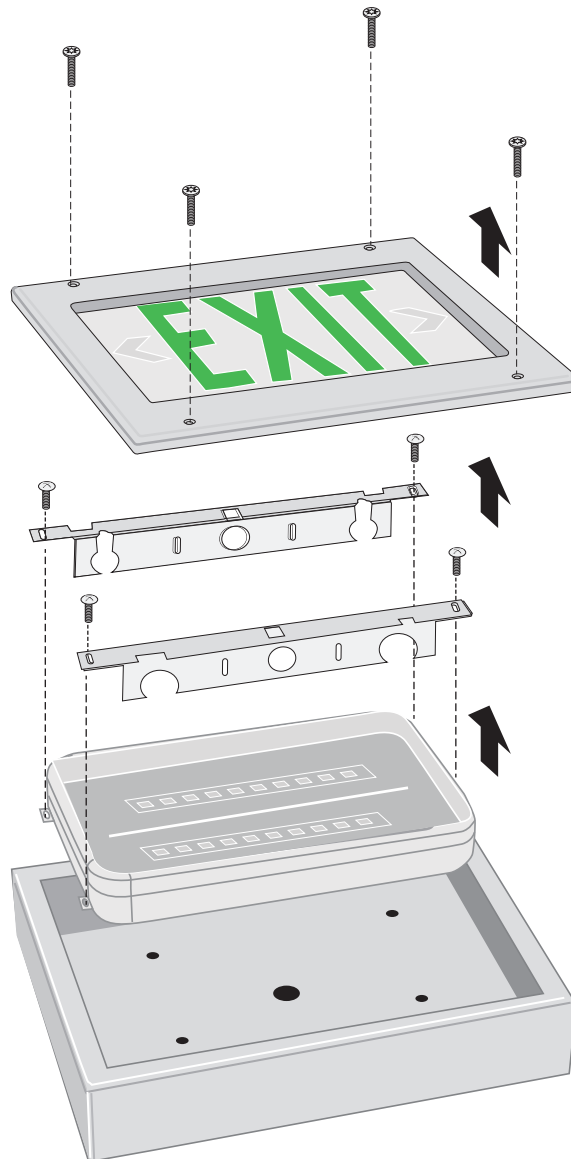


SEE NEXT PAGE

2) Place fixture body against surface (making sure it is level), and mark and drill holes for fasteners (by others). We've prepped the body with four 5/16" knockouts for the fasteners and a 7/8" knockout for wiring.

3) Place fixture body against surface and secure tightly.

4) Replace internal EXIT components and then replace door. Do NOT torque door fasteners to more than 28lbs.

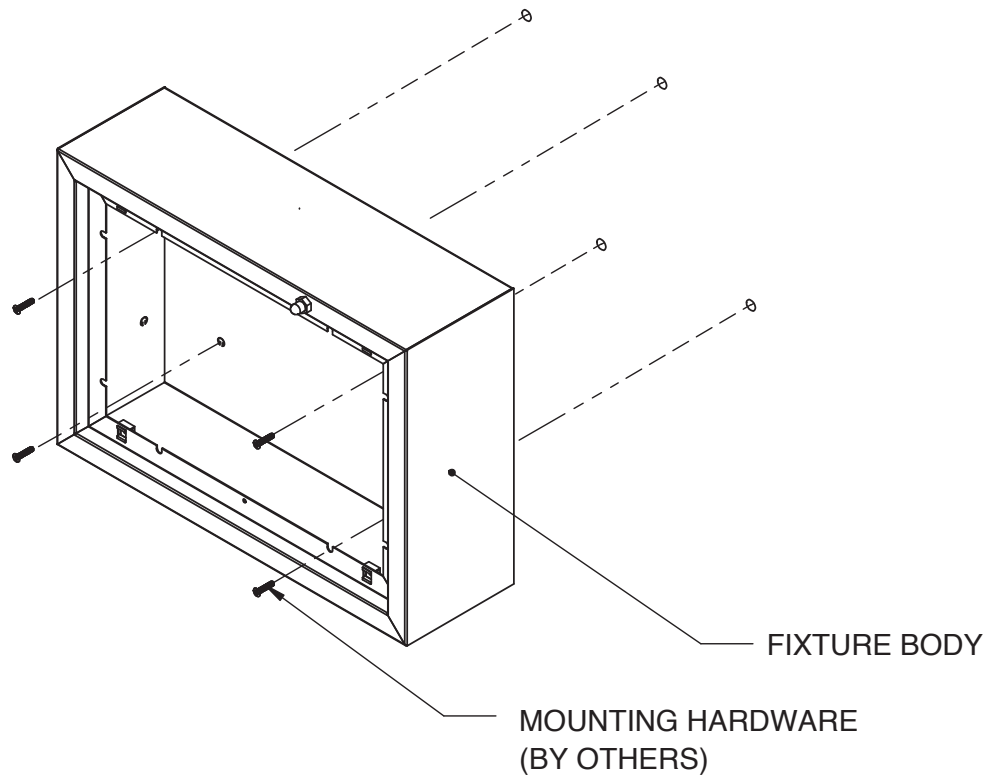

IN ORDER TO HAVE A MOISTURE PROOF SEAL, MAKE SURE NOT TO DAMAGE GASKET DURING INSTALLATION. DOOR FRAME FASTENERS MUST HAVE WASHERS TO INSURE A SEAL.