

XEM9U

ALL LED
EXIT &
EMERGENCY
COMBO



NH model



The XEM9U is a long lasting, efficient ultra-bright white LED lamp with heads.

ILLUMINATION: 1 watt (8 LEDs x 0.125 watt) per head. High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution. Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing. Long-life, energy efficient Red or Green LED exit sign illumination.

ELECTRICAL: Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing. 9.6V Long-life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING: EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

HOUSING: Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish. EZ snap-out Chevron directional indicators.

OPTIONS: HL: 12-LED heads provide increased center-to-center spacing (1.5W per head). SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. NH: No lamp head attach to the unit enabling it to be used as remote capable exit sign. Custom: Signs available with requested "special" wording. USA: Substantial transformation assembly in U.S. complies with "Assembled in USA" under the Buy American Act.

LISTINGS: Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. UL Listed for damp locations (0°C – 40°C). Certified to CEC under Title 20 Regulations.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

Ordering Information on Next Page ►


ORDERING INFORMATION Example: XEM9U-2-R-W-SDT

SERIES	# OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
XEM9U	2 Universal Single/Double Face	R Red G Green	W White B Black	RC Remote Capacity HL High Lumen SDT Self-diagnostics NH NO Lamp heads USA Assembled in USA CUST Custom Wording


Best #LEDCXTEU

DIMENSIONS

Standard

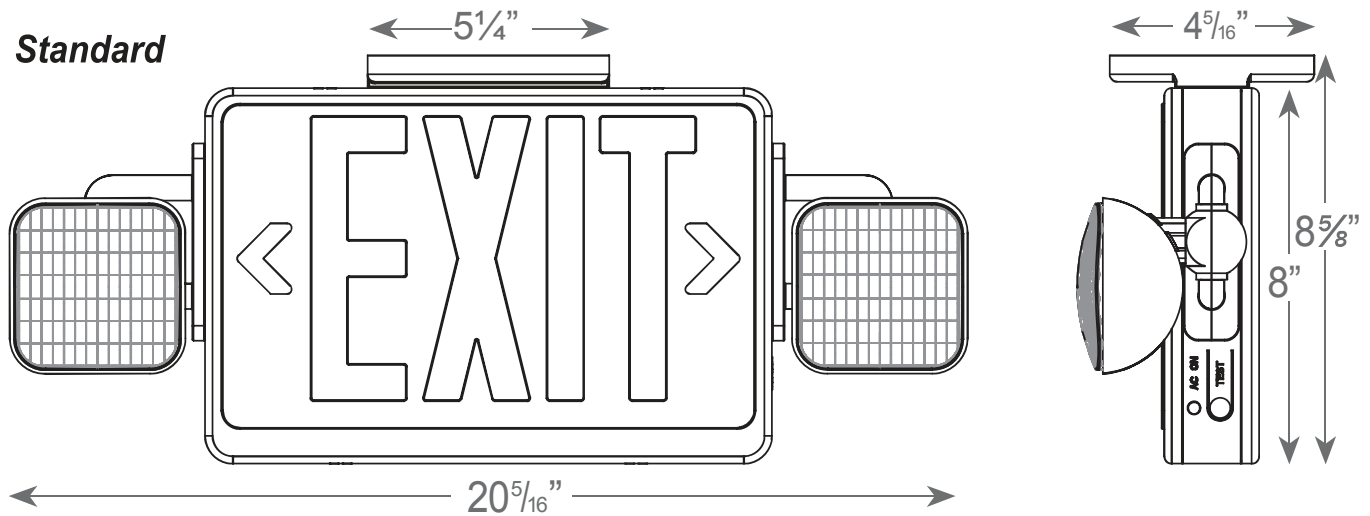

-NH model

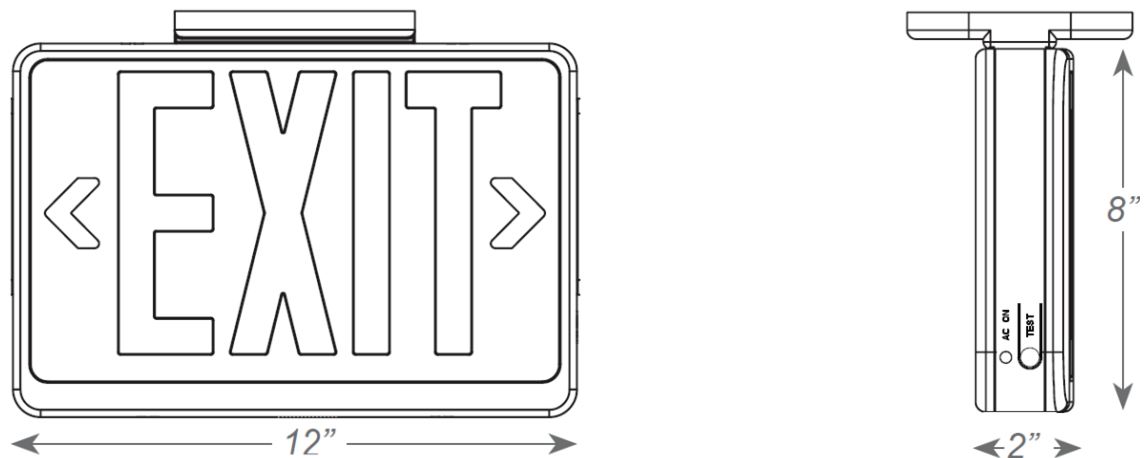

ELECTRICAL INFORMATION

	INPUT WATTS (W)		INPUT AMPS (A)	
	120V277V	120V277V	120V277V	120V277V
RED	7.3	8.3	040.0	020.0
GREEN/RC	0.3	2.3	030.0	410.0
RED/RC	4.3	6.3	330.0	510.0
RED/GREEN -SDT/RC-SDT	5.2	5.7	0.046	0.022

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY											
			MRHLED	RHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED
				MV		6V	12V	6V	12V	6V	12V	6V	12V	
XEM-RC	9.6V	3W-4W		X	X									
XEM-NH	9.6V	3W		X	X									
XEM-RC-NH	9.6V	6W		X	X									