

CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!



WARNING: Before beginning installation, disconnect electrical power at main switch or circuit breaker.

IMPORTANT SAFEGUARDS

Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable. Installation and servicing of this equipment should be performed by qualified service personnel only. Do not mount near gas or electric heaters. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability. Do not use this equipment for other than intended use.

DO NOT MOUNT NEAR GAS OR ELECTRIC HEATERS • EQUIPMENT SHOULD BE MOUNTED AT HEIGHTS WHERE ACCESS BY UNAUTHORIZED PERSONNEL IS LIMITED • DO NOT USE OUTDOORS
• USE OF ACCESSORY EQUIPMENT IS NOT RECOMMENDED

GENERAL INSTRUCTIONS


Exit light will be secured by fastening the case to the wall (fasteners not included).

STEP 1: Place housing over an installed junction box, mark mounting location (making sure surface is clean and flat). Mark and/or drill thru hole provisions on mounting plate.

STEP 2: Thread wiring into wall and connect to power source/ground/neutral.

STEP 4: Position light unit into position and tighten with fasteners.

NOTE: A allenhead wrench is supplied with fixture - this can also be used thru test hole for sign diagnosis test.
IT IS NOT FOR REMOVING THE FACE OF THE SIGN.

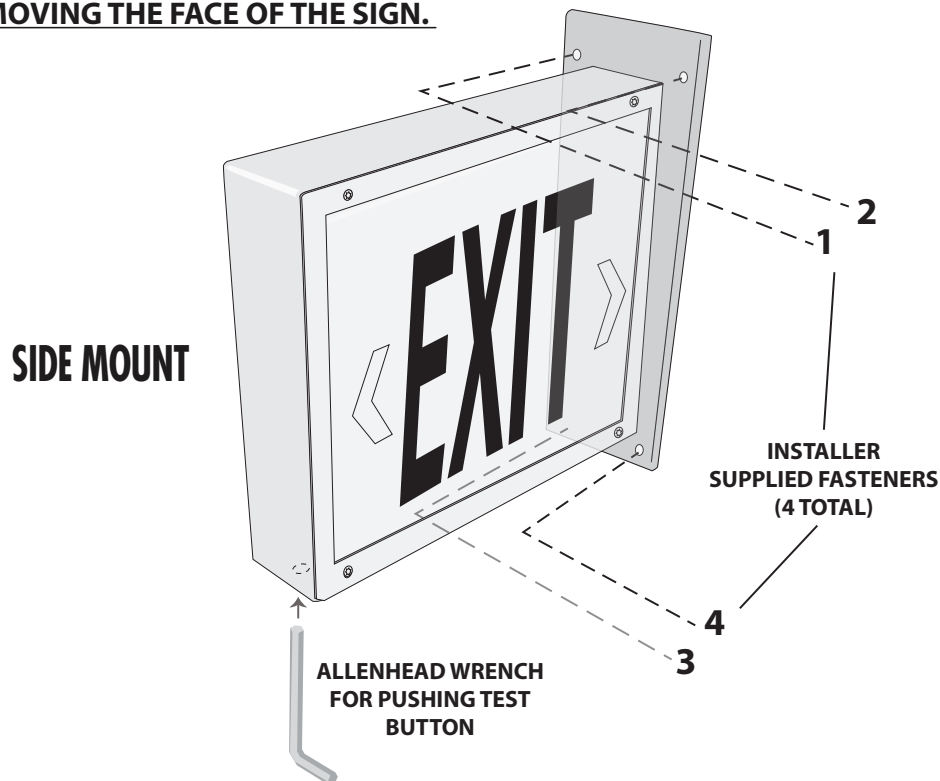

GENERAL INSTRUCTIONS

Exit light will be secured by fastening the case to the ceiling (fasteners not included).

STEP 1: Place housing over an installed junction box, mark mounting location (making sure surface is clean and flat). Mark and/or drill thru hole provisions on mounting plate.

STEP 2: Thread wiring into wall and connect to power source/ground/neutral.

STEP 4: Position light unit into position and tighten with fasteners.

NOTE: A allenhead wrench is supplied with fixture - this can also be used thru test hole for sign diagnosis test.
IT IS NOT FOR REMOVING THE FACE OF THE SIGN.

