CATALOG #:	
PROJECT:	
TYPE:	

SSSQ10 STRAIGHT STEEL SQUARE POLE

N2M is proud to introduce a new standard in high-quality steel lighting poles. American made steel combined with unwavering accuracy and a wide range of drilling and finish options, make N2M poles the perfect choice for your next project. Our BAA compliant poles are an obvious choice over inferior, imported options.

PRODUCT SPECIFICATIONS

CONSTRUCTION: Our SSSQ Pole is manufactured here in the U.S. from a single piece of formed steel. Featuring high strength, domestic hot rolled carbon steel. Our poles also come standard with a minimum yield strength of 50,000 PSI (which conforms to ASTM A500 grade C requirements). The easy-access hand hole is located 12" above the base. A high-quality, heavy-gauge ground lug is included standard.

ANCHOR BASE: Our anchor base is made from ASTM A36 grade hot rolled carbon steel plate and comes standard with a minimum yield strength of 36,000 PSI. An aluminum marine-grade base plate cover is provided which encloses the base plate and anchor bolts. Anchor bolts available to purchase as an accessory, and available as pre-shipped with a rigid template.

MOUNTING/DRILL PATTERN: A variety of mounting and drill patterns are offered to meet the needs of various applications. Inquire with your N2M representative for custom drill patterns.

FINISH: A highly durable, long-lasting polyester powder coat finish is standard and can be applied in a variety of finish options. Standard colors include black, bronze, white, green, silver, grey (custom colors are available). Galvanized and painted galvanized poles are also available.

POLE ORDERING INFORMATION Example: SSSQ-4-10-7-BLK-90D3-CUST

SSSQ						
SERIES	**POLE SIZE**	**POLE HEIGHT**	**POLE GAUGE**	**FINISH**	**MOUNTING**	**DRILL PATTERN**
SSSQ	4 4" Square	10 10' Nominal	7 7Gauge	BLK Black	D1 Drill One Side	None (Tenon Mounting)
				BRZ Bronze	90D2 Drill 2 Sides at 90°	CUST Custom (Consult Factory)
				WHT White	180D2 Drill 2 Sides at 180°	
				GRN Green	90D3 Drill 3 Sides at 90°	
				SLV Silver	90D4 Drill 4 Sides at 90°	
				GRY Grey	TE238 2-3/8" OD Tenon	
				GLV Galvanized	TE278 2-7/8" OD Tenon	
				GLVP1 Galvanized/Painted	TE312 3-1/2" OD Tenon	
				SP Custom Color	NO No Drilling	
				Standard RAL Colors		

ANCHOR BOLT ORDERING INFORMATION (order anchor bolts as a separate line item) **Example:** PAB3418-PS

PAB3418 (Plain)	☐	PS (Preshipped)
PAB3418G (Galv)	☐	PS (Preshipped)

Anchor bolts are available as pre-shipped. If you don't select preshipped, anchor bolts will be shipped with order.

Anchor bolts include a rigid template.

Order includes four (4) 3/4"x18"x3" anchor bolts, and 2 nuts and 2 washers per anchor bolt.

SSSQ10 STRAIGHT STEEL SQUARE POLE

CATALOG #:	
PROJECT:	
TYPE:	

NOTICE: Arms and light fixtures must be mounted before the pole is placed in position. The pole may develop harmonic distortions and fatigue (a rare occurance) if erected without them. Failure to mount arms and fixtures will void the factory warranty.





Base plates always measured on a diagonal

DRILLING LOCATIONS:

SIDES	A	B	C	D
HAND HOLE	X			
D1	X			
90D2	X	X		
180D2		X		X
90D3	X	X		X
90D4	X	X	X	X

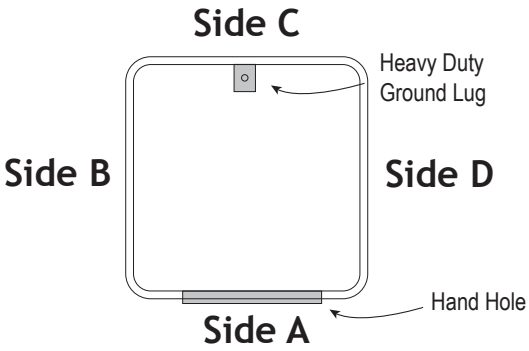

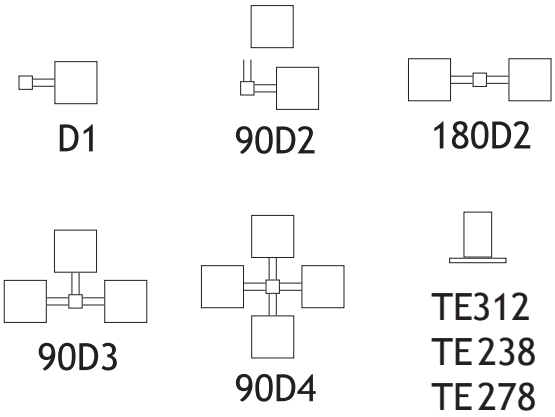

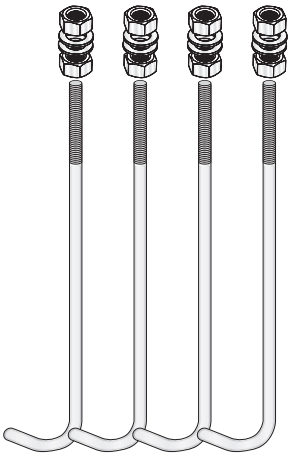

A55 GRADE ANCHOR BOLTS

3/4”x18”x3” anchor bolts, and includes 2 nuts and 2 washers per anchor bolt

5052 MARINE GRADE ALLOY ALUMINUM, POWDER COATED POLE BASE COVER