Advantage Environmental Lighting

WAL
7" WRAP WIRED FOR LED TUBES

PRODUCT SPECIFICATIONS

DESCRIPTION
The WAL Series is a 7" Wrap wired for LED tubes available in 2' or 4' body lengths. It is a low-profile, narrow, 2 lamp wrap that was designed for surface mounting applications. The WAL utilizes state-of-the-art technology to deliver the highest possible efficiency in the lighting industry.

APPLICATIONS
The WAL Series of Wraps wired for LED tubes were designed to be high quality, energy efficient fixtures for use in commercial applications, industrial and garage applications, as well as kitchens, offices and storage rooms.

CONSTRUCTION
The fixture is constructed of a die-formed heavy gauge steel body. Housing embossed for maximum rigidity. Smooth hemmed sides for safe handling.

OPTICAL SYSTEM
White polyester polymer finish with a minimum 93% reflectivity. Lift-and-shift lens. Advanced micro-prism clear acrylic lens design provides excellent lamp obscuration. Linear sides provide excellent light distribution and put more light in task areas. Manufactured from durable DR/Acrylic polymer blend.

ELECTRICAL SYSTEM
120/277V applications.

MOUNTING
Unit maybe surface, stem or aircraft cable mounted individually or in continuous rows

LISTINGS
ETL and cETL Listed. Damp location rated.

WARRANTY
5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.
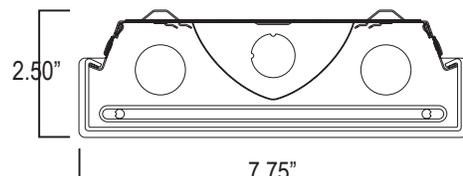
ORDERING INFORMATION
Example: WAL30SM

Series	Body Length		Number of Lamps		Length (IN)		Wire Application		LED		WT Wattage	
WAL	2	2'	2	2 Lamps	17	17W T8 (2")	BLANK	Single End Wiring*	LED	Wired for LED Lamps (Furnished by Others)	10	10 Watt 24" or 36"
	4	4'			28T8	28W T8 (51.65")	DE	Double End Wiring**	WT	With Tubes Included*	12	12 Watt 48"
					28T5	28W T5 (51.65")					15	15 Watt 36" or 48"
					32	32W T5 (51.65")					18	18 Watt 48"
					54	54W T5HO (51.65")			*Be sure and select correct Tube wattage when choosing WT		20	20 Watt 48"

*Non-Shunted Sockets Wired at One End (Blank)
**Shunted Sockets Wired with White, Opposite End Wired with Black (DE)

WT Color Temp		Emergency Options		Hanging Options	
35	3500K	12EBL	1200 Lumen Emergency Ballast	(blank)	None
40	4000K			AC10	Aircraft Cable 10'
50	5000K			AC15	Aircraft Cable 15'
				AC20	Aircraft Cable 20'
				JC10	Jack Chain 3pc @ 10' W/ S Hooks

FIXTURE DIMENSIONS

2.50"

7.75"